

## JLR ESL emulator for



Jaguar F-PACE and similar,  
2014 and up, CAN based systems

### Purpose:

For JLR cars, F-Pace and similar, from 2014. Original SCL replacement, self teaching (Plug & Play).

### Installation:

SCL connector pinout: pin1: **GND**, pin2: **PWR** (+12v switched), pin3: **CAN Lo**, pin4: **CAN Hi**.  
Solder wires or use 2.54mm angled pin header to plug emulator into SCL wiring plug directly.

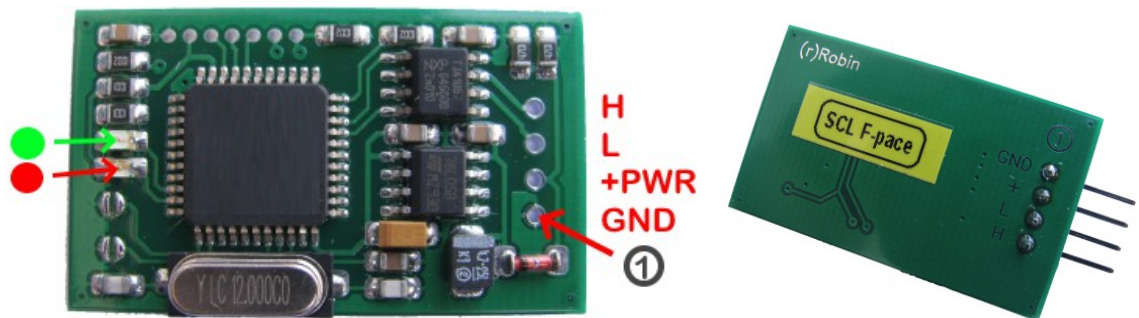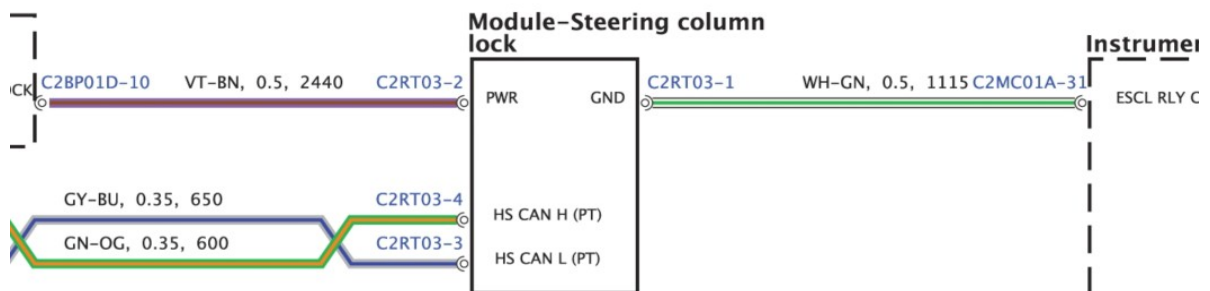

### LEDs on emulator board:

- **GREEN**: SCL is unlocked;
- **RED**: SCL is in locked state.

### Notes:

- SCL is not powered permanently, power is switched on for short time to perform LOCK / UNLOCK actions.
- Difference from older systems: PWR and GND lines are swapped (on cars before 2014 PWR is connected to pin1 and GND is pin2 ). This emulator works only for 2014 and up.

