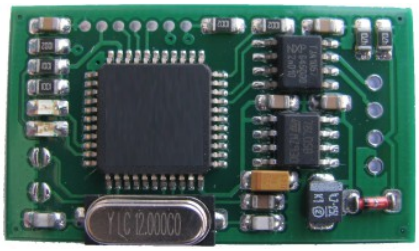

Jaguar / RR ESCL emulator GEN 2

CAN based systems, 2014 up

Range Rover (L405 2014 up)
Jaguar F-Pace (X761 2016up)
etc.

Purpose:

For JLR cars, F-Pace and similar, from 2014. Original SCL replacement, self teaching (Plug & Play).

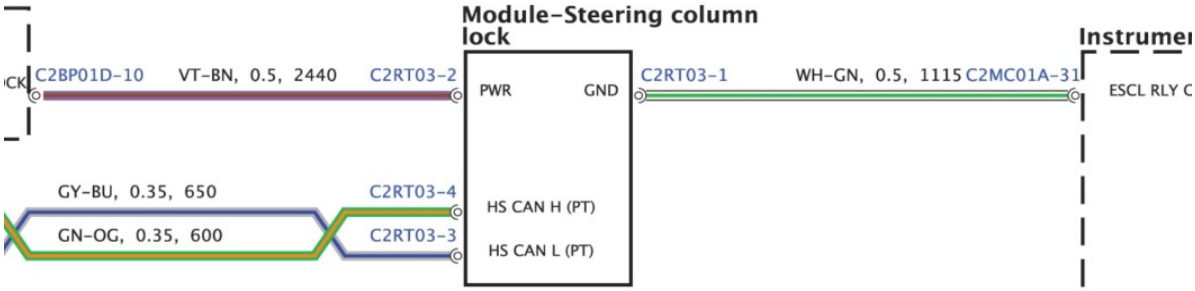

Installation:

SCL connector pinout: pin1: **GND**, pin2: **PWR** (+12v switched), pin3: **CAN Lo,** pin4: **CAN Hi**.
Solder wires directly or use 2.54mm angled pin header to plug emulator into SCL wiring connector.

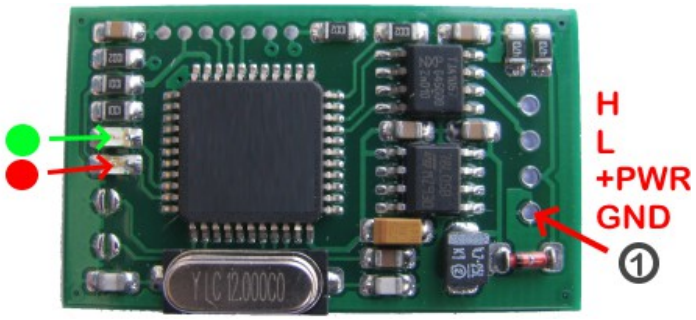

LEDs on emulator board:

- **GREEN**: SCL is unlocked;
- **RED**: SCL is in locked state.

Notes:

- SCL is not powered permanently, power is switched on for a short time to perform LOCK / UNLOCK actions.
- Difference from older systems: PWR and GND lines are swapped (on cars before 2014 PWR is connected to pin1 and GND is pin2). This emulator works only for 2014 and up.

(c) RobinDAB '2021